Test Report

Applicant:	ZhongshanSaifute Labor Protective Articles Co., Ltd
Address:	No.4, Xihuan 4th Road,Southern District,Zhongshan, Guangdong Province, China

The following sample(s) was/were submitted and identified on behalf of the client as:

Product name:	LAIANZHI FISH SHAPE DISPOSABLE PROTECTIVE MASK
Model:	YXP311
Brand:	LAIANZHI
Claim level:	FFP3
Sample quantity:	120 Pcs
Sample Received Date:	Jul. 01, 2020
Testing Period:	Jul. 01, 2020~ Jul. 06, 2020

Test Requirement:

According to the requirement of the client, the test item(s) of the sample is according to the standard EN149:2001+A1:2009.

Test Result(s): Please refer to the following page(s)

Test Method: Please refer to the following page(s)

Compiled by: _____ Reviewed by: _____

Approved by: _____ Date: 2020-07-07

Summary of assessment*

Clause	Assessment
7.3 Visual inspection	NRq
7.4 Packaging	Pass
7.5 Material	Pass
7.6 Cleaning and disinfecting	N.A.
7.7 Practical performance	Pass
7.8 Finish of parts	Pass
7.9.1Total inward leakage	Pass
7.9.2Penetration of filter material	Pass
7.10 Compatibility with skin	Pass
7.11Flammability	Pass
7.12Carbon dioxide content of the inhalation air	Pass
7.13Head harness	Pass
7.14Field of vision	Pass
7.15 Exhalation valve(s)	Pass
7.16Breathing resistance	Pass
7.17 Clogging	N.A.
7.18 Demountable parts	Pass

Key

Pass	Requirement satisfied.
NRq	The clauses were not required.
Fail	Requirement not satisfied. Refer to the "Result details" section for more information.
N.A.	Assessment not carried out.

* Assessment relates only to those specimens which were tested and are the subject of this report.

Test Result

Respiratory Protective Devices — Filtering Half Masks to Protect against Particles — Requirements, Testing, Marking
(EN 149:2001+A1:2009)

Clause 7.3 Visual inspection

Test Requirement	Results	Comment
Marking and the information supplied by the manufacturer, requirements refer to clause 9 and clause 10.	The clauses were not required.	NRq

Clause 7.4 Packaging
(EN 149:2001+A1:2009 Clause 8.2)

Test Requirement	Results	Comment
Particle filtering half masks shall be offered for sale packaged in such a way that they are protected against mechanical damage and contamination before use.	Comply	Pass

Clause 7.5 Material
(EN 149:2001+A1:2009, Clause 8.2 & 8.3.1 & 8.3.2)

Test Requirement	Results	Comment
Materials used shall be suitable to withstand handling and wear over the period for which the particle filtering half mask is designed to be used.	Comply	Pass
After undergoing the conditioning described in 8.3.1 none of the particle filtering half masks shall have suffered mechanical failure of the facepiece or straps.	Comply	Pass
When conditioned in accordance with 8.3.1 and 8.3.2 the particle filtering half mask shall not collapse.	Comply	Pass
Any material from the filter media released by the air flow through the filter shall not constitute a hazard or nuisance for the wearer.	Comply	Pass

Clause 7.6 Cleaning and Disinfecting

(EN 149:2001+A1:2009, Clause 8.4 & 8.5 & 8.11)

Test Requirement	Results	Comment
If the particle filtering half mask is designed to be re-usable, the materialsused shall withstand the cleaning and disinfecting agents and procedures tobe specified by the manufacturer. With reference to 7.9.2, after cleaning and disinfecting the re-usable particlefiltering half mask shall satisfy the penetration requirement of the relevantclass.	Assessment not carried out.	N.A.

Clause 7.7 Practical Performance

(EN 149:2001+A1:2009, Clause 8.4)

Test Requirement	Results Sample 11#~12#:	Comment
General: a) head harness comfort b) security of fastenings c) field of vision d) any other comments reported by the wearer on request.	No imperfections	Pass
Walking Test: The subjects wearing normal working clothes and wearing the particle filtering half mask shall walk at aregular rate of 6 km/h on a level course. The test shall be continuous, without removal of the particlefiltering half mask, for a period of 10 min.	No imperfections	
Work Simulation Test: a) walking on the level with headroom of (1.3±0.2)m for 5min b) crawling on the level with headroom of (0.7±0.05)m for 5min c) filling a small basket (see Figure 1, approximate volume = 8 l) with chippings or other suitablematerial from a hopper which stands 1,5 m high and has an opening at the bottom to allow thecontents to be shovelled out and a further opening at the top where the basket full of chippings isreturned.	No imperfections	

Clause 7.8 Finish of Parts

EN 149:2001+A1:2009, Clause 8.2)

Test Requirement	Results	Comment
Parts of the device likely to come into contact with the wearer shall have nosharp edges or burrs.	No sharp edges or burrs	Pass

Clause 7.9.1Total Inward Leakage

(EN 149:2001+A1:2009 Clause 8.5)

Test Requirement	**Results**	**Comment**
For particle filtering half masks fitted in accordance with the manufacturer's information, at least 46 out of the 50 individual exercise results (i.e. 10 subjects x 5 exercises) for total inward leakage shall be not greater than: 25% for FFP1 11% for FFP2 5% for FFP3 and, in addition, at least 8 out of the 10 individual wearer arithmetic means for the total inward leakage shall be not greater than: 22% for FFP1 8% for FFP2 2% for FFP3	Detail refer to Appendix 1	Pass

Appendix1:Summarizationof TestData

Subject	Sample	Condition	Normal Breathing (%)	Head Side/Side (%)	Head Up/Down (%)	Speak Loudly (%)	Normal Breathing (%)	Mean (%)
Huang	1#	A.R.	1.040	1.270	1.425	2.411	1.028	1.435
Zhou	2#	A.R.	0.899	1.078	1.156	1.234	1.085	1.090
Ma	3#	A.R.	1.389	1.217	1.507	1.984	1.468	1.513
Wu	4#	A.R.	1.278	1.418	1.632	1.794	1.153	1.455
Li	5#	A.R.	1.638	1.879	2.012	2.648	1.754	1.986
Wu	6#	T.C.	1.180	1.036	1.219	1.473	1.199	1.221
Zhai	7#	T.C.	0.942	1.563	1.490	1.677	1.285	1.391
Zheng	8#	T.C.	1.149	1.108	1.356	1.597	1.359	1.314
Huang	9#	T.C.	1.362	1.183	1.491	1.988	1.279	1.461
Wu	10#	T.C.	1.288	1.231	1.762	1.590	1.349	1.444

Facial Dimension:

Subject	Lengthof Face (mm)	WidthofFace (mm)	Depthof Face (mm)	Widthof Mouth (mm)
Huang	130	140	125	53
Zhou	100	148	125	55
Ma	120	158	110	50
Wu	110	148	121	44
Li	112	146	112	50
Wu	120	154	128	54
Zhai	135	165	125	53
Zheng	106	155	112	54
Huang	105	157	118	51
Wu	112	172	118	55

Clause 7.9.2 Penetration of Filter Material

(EN 149:2001+A1:2009, Clause 8.11 & EN 13274-7:2019)

<table>
<tr><th>Test Requirement</th><th>Results</th><th>Comment</th></tr>
<tr><td>The penetration of the filter of the particle filtering half mask shall meet therequirements of the following table.
<table>
<tr><td rowspan="2">Classification</td><td colspan="2">Maximum penetration of test aerosol</td></tr>
<tr><td>Sodium chloride test
95L/min
%
max.</td><td>Paraffin oil test
95 L/min
%
max.</td></tr>
<tr><td>FFP1</td><td>20</td><td>20</td></tr>
<tr><td>FFP2</td><td>6</td><td>6</td></tr>
<tr><td>FFP3</td><td>1</td><td>1</td></tr>
</table></td><td>Detail refer to Appendix 2</td><td>Pass</td></tr>
</table>

Appendix 2: Summarization of Test Data

Penetration of filter material

Aerosol	Condition	Sample No.	Penetration (%)		Assessment
			Average in 30s after 3 min	Max. during exposure	
Sodium chloride test	A.R.	13#	0.6	/	Pass
		14#	0.6	/	
		15#	0.6	/	
	S.W.	22#	0.8	/	
		23#	0.7	/	
		24#	0.6	/	
	M.S. + T.C.	25#	/	0.7	
		26#	/	0.6	
		27#	/	0.6	
Paraffin oil test	A.R.	16#	0.6	/	
		17#	0.9	/	
		18#	0.7	/	
	S.W.	19#	0.9	/	
		20#	1.0	/	
		21#	0.5	/	
	M.S. + T.C.	28#	/	0.9	
		29#	/	0.8	
		30#	/	1.0	
Flow conditioning: 95.0 L/min					

Clause 7.10 Compatibility with Skin

(EN 149:2001+A1:2009, Clause 8.4 & 8.5)

Test Requirement	Results	Comment
Materials that may come into contact with the wearer's skin shall not be known to be likely to cause irritation or any other adverse effect to health.	No irritation or any other adverse effect to health	Pass

Clause 7.11 Flammability
(EN 149:2001+A1:2009, Clause 8.6)

Test Requirement	Results	Comment
The material used shall not present a danger for the wearer and shall not beof highly flammable nature when tested, the particle filtering half mask shall not burn or not to continueon burn for more than 5 s after removal from the flame.	Detail refer to Appendix 3	Pass

Appendix 3: Summarization of Test Data

Flammability

Condition	Sample No.	Result	Assessment
A.R.	31#	Nonflammable	Pass
	32#	Nonflammable	
T.C.	33#	Nonflammable	
	34#	Nonflammable	

Clause 7.12 Carbon Dioxide Content of The Inhalation Air
(EN 149:2001+A1:2009, Clause 8.7)

Test Requirement	Results	Comment
The carbon dioxide content of the inhalation air (dead space) shall notexceed an average of 1,0 % (by volume)	Detail refer to Appendix 4	Pass

Appendix 4: Summarization of Test Data

Carbon Dioxide Content of The Inhalation Air

Condition	Sample No.	Result		Assessment
A.R.	35#	0.34%	Mean value 0.34%	Pass
	36#	0.33%		
	37#	0.34%		

Clause 7.13 Head Harness

(EN 149:2001+A1:2009, Clause 8.4 & 8.5)

Test Requirement	Results	Comment
The head harness shall be designed so that the particle filtering half mask can be donned and removed easily.	Comply	Pass
The head harness shall be adjustable or self-adjusting and shall be sufficiently robust to hold the particle filtering half mask firmly in position and be capable of maintaining total inward leakage requirements for the device.	Comply	

Clause 7.14 Field of Vision

(EN 149:2001+A1:2009, Clause 8.4)

Test Requirement	**Results**	**Comment**
The field of vision is acceptable if determined so in practical performance	Comply	Pass

Clause 7.15 Exhalation Valve(s)

(EN 149:2001+A1:2009, Clause 8.2 & 8.9.1 & 8.3.4 & 8.8)

Test Requirement	**Results**	**Comment**
	Sample 50#~52#:	
a) A particle filtering half mask may have one or more exhalation valve(s), which shall function correctly in all orientations.	Comply	Pass
b) If an exhalation valve is provided it shall be protected against or be resistant to dirt and mechanical damage and may be shrouded or may include any other device that may be necessary for the particle filtering half mask to comply with 7.9.	Comply	
c) Exhalation valve(s), if fitted, shall continue to operate correctly after a continuous exhalation flow of 300 l/min over a period of 30 s.	Comply	
(d) When the exhalation valve housing is attached to the faceblank, it shall withstand axially a tensile force of 10N applied for 10 s.	Comply	

Clause 7.16 Breathing Resistance

EN 149:2001+A1:2009, Clause 8.9)

Test Requirement	Results	Comment
The penetration of the filter of the particle filtering half mask shall meet the requirements of the following table.	Detail refer to Appendix 5	Pass

Classification	Maximum permitted resistance (mbar)		
	Inhalation		Exhalation
	30 L/min	95 L/min	160 L/min
FFP1	0.6	2.1	3.0
FFP2	0.7	2.4	3.0
FFP3	1.0	3.0	3.0

Appendix 5: Summarization of Test Data

Specimen	Condition	Inhalation		Exhalation resistance(mbar)				
		At 30 L/min	At 95 L/min	At 160 L/min				
				A	B	C	D	E
38#	A.R.	0.48	1.83	2.20	2.24	2.23	2.21	2.26
39#		0.51	1.85	2.25	2.28	2.24	2.26	2.29
40#		0.52	1.84	2.21	2.24	2.23	2.26	2.24
41#	S.W.	0.54	1.85	2.28	2.26	2.29	2.30	2.27
42#		0.55	1.88	2.29	2.31	2.27	2.28	2.32
43#		0.57	1.89	2.32	2.30	2.29	2.28	2.26
44#	T.C.	0.49	1.76	2.21	2.20	2.18	2.19	2.17
45#		0.51	1.82	2.23	2.20	2.21	2.17	2.19
46#		0.49	1.75	2.20	2.16	2.15	2.17	2.16
47#	T.C.+F.C.	0.45	1.74	2.04	2.10	2.09	2.07	2.11
48#		0.47	1.73	2.06	2.09	2.11	2.08	2.12
49#	F.C.	0.51	1.80	2.13	2.16	2.14	2.17	2.18

A: facing directly ahead; B: facing vertically upwards; C: facing vertically downwards; D: lying on the left side; E: lying on the right side

Clause 7.17 Clogging

(EN 149:2001+A1:2009, Clause 8.9 & 8.10)

Test Requirement	Results	Comment
Clause 7.17.2 Breathing resistance Valved particle filtering half masks: After clogging the inhalation resistances shall not exceed: FFP1: 4 mbar, FFP2: 5 mbar, FFP3: 7 mbar at 95L/min continuous flow The exhalation resistance shall not exceed 3 mbar at 160 L/min continuous flow. Valveless particle filtering half masks: After clogging the inhalation and exhalation resistances shall not exceed: FFP1: 3 mbar, FFP2: 4 mbar, FFP3: 5 mbar at 95L/min continuous flow	Assessment not carried out.	N.A.

Test Requirement	Results	Comment
Clause 7.17.3 Penetration of filter material All types (valved and valveless) of particle filtering half masks claimed to meet the clogging requirement shall also meet the requirements.	Assessment not carried out.	N.A.

Classification	Maximum penetration of test aerosol	
	Sodium chloride test 95 L/min	Paraffin oil test 95 L/min
	%	%
	max.	max.
FFP1	20	20
FFP2	6	6
FFP3	1	1

Clause 7.18 Demountable Parts

(EN 149:2001+A1:2009, Clause 8.2)

Test Requirement	Results	Comment
All demountable parts (if fitted) shall be readily connected and secured, where possible by hand	Comply	Pass

Sample photo(s)：

Fig.1

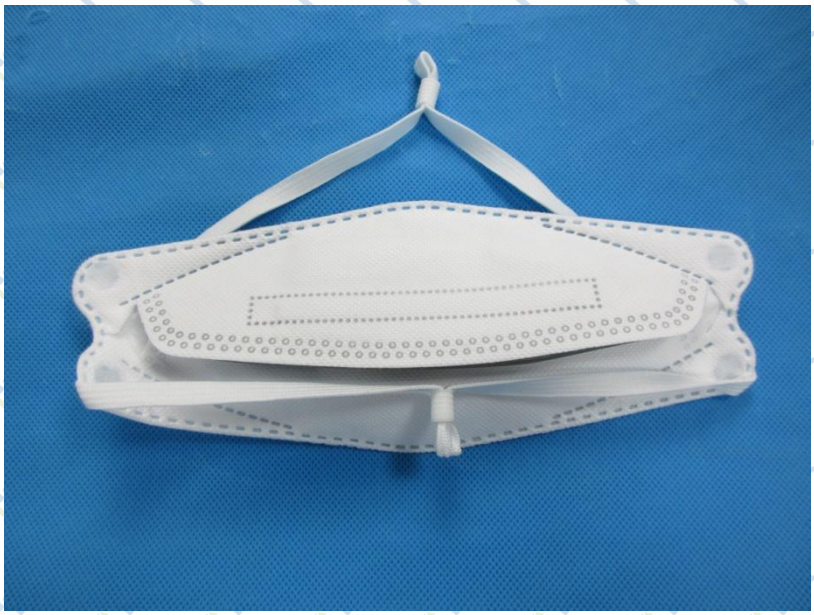

Fig.2

Fig.3

****End of Report****

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of NTEK, this report can't be reproduced except in full.